

# SPACIO *Plus* & STALLION *Plus*

ENHANCEMENTS MADE TO THE EXISTING TILE  
BASED SYSTEMS TO GIVE A FRESHER AND BETTER  
LOOK AND FEEL TO OUR OFFERINGS

# NEED FOR THE ENHANCEMENTS

Complaints on bowing of the 4'6" and 5' wide tiles.

Complaints on many visible gaps between tiles.

Customization of the top tile to end below worktop level & the bottom tile to end at worktop level instead of projecting 2" above the worksurface level.

Complete single tile offerings on the aisle side

Tender requirement of 1200 mm ht but 1251 mm instead of 1200 mm ht offered as that was the height of our setup

Frequent 'falling' tiles issues from site

# INTRODUCING THE NEW SYSTEMS – SPACIO *Plus* & STALLION *Plus*




What is 'NEW' in the new systems????

# FRAMES...

The Internal frame work is changed to give better rigidity , better fixing of tiles, enhanced and easier option for wire management, and supports larger height of tiles.

The overall height of the frame is reduced by 3" to match the overall panel height to 1200 mm.

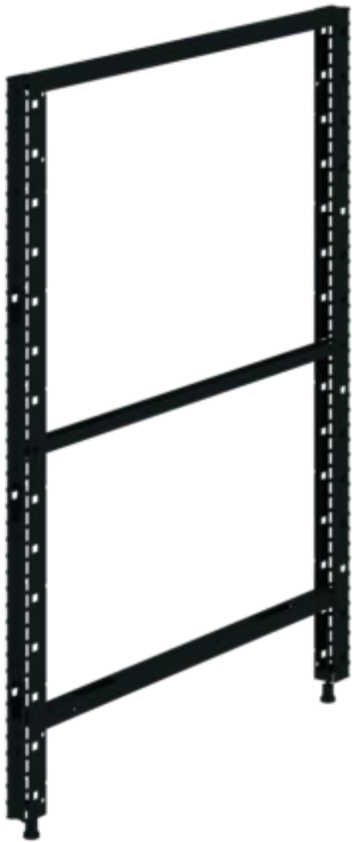

Options of different types of frames :

- Normal frames – frame width of min. 1' to max 4'
- Bolted frames – options of 2 frames bolted together to form sizes from 3'6" to 5' frame offering
- Extended frames – new frames which can be offered without the 3way 90 deg trim on the aisle side.



Normal Panel



Panel with Bolted Frames



Aisle Side Panel with Offset

Additionally the extension frames also remains as the part of the new offering.

# TILES....

The larger width of tiles (above 4' w) have been replaced with larger height of tiles.

So now we can offer single tiles along the height of the frame rather than the width of the tiles.

Not only that, we can also offer tile heights now in the pitch of 3".



- Issues of the tiles coming above the worksurface level can now be addressed by giving the tiles with the difference in 3" of height giving a cleaner gap free look at the worktop level



- Full height of the panel is without any horizontal gaps giving a seamless look to the panels on the aisles. However the tiles on the inside of the panel are divided to provide the various functionalities to the users.

# WHAT HAS BEEN CHANGED FROM THE EARLIER OFFERING???

Tile divider panels have now been replaced by bolted frames.

4' 6" and 5' width of tiles which had issues of bowing has been discontinued. However, single raceways at the bottom level up to 5' can be offered.

More variety in the tiles heights are possible, by which, the horizontal gap seen in the panel can be reduced giving a cleaner look to the workstation.

Overall panel heights have been reduced to match tender specifications of the market.

# Order booking and Delivery

Order booking will follow the same process of docket making as for the tile based system.

Software with the updated systems features shall be sent by the end of this month to the branch teams at the zones to be able to make the offerings with the enhanced features.

Delivery timelines and the complexity type definitions also will remain to be same as it was for Smart and Derive systems.

## Material finishes.

The finishes of tiles remain same as was offered in smart and derive systems.

All shades from the Colour palette Pro shade Box for DL, Fabrics and metal shades can be offered.